

SPIRENT GSS6300

GNSS SIGNAL GENERATOR

The GSS6300 GNSS Signal Generator from Spirent has been designed specifically for high volume production test applications for devices that use commercial GPS/SBAS/QZSS, GLONASS, BeiDou and Galileo receivers.

Key Features

- Single channel GPS/SBAS/QZSS L1 C/A and/or GLONASS L1 C/A and/or BeiDou-2 B1 and/or Galileo E1 signals in one chassis
- Easily field upgradable to add GLONASS and/or BeiDou and/or Galileo and/or QZSS to existing GSS6300 chassis
- IEEE-488, USB or RS-232 control interfaces
- Equivalent GPS performance to Spirent's proven GSS6100
- Alternative "instant start" continuous run mode
- Supplied with Spirent SimCHAN™ software
- Industry leading accuracy, fidelity and reliability
- A GSS6300 configured with GPS supports L1 SBAS messages
- Comprehensive remote command set for easy ATE integration
- Rack mount 2U chassis
- In-rack annual calibration
- Interactive run time control over power level, Doppler, PRN, GPS time and data message for each GNSS signal
- May be synchronized to external systems via 1PPS/Trigger, reference frequency input/output and 1PPS output

Please contact us for further information.
We will be pleased to discuss your specific requirements.

The GSS6300 GNSS Signal Generator can be configured with one channel of GPS only, or with multiple constellations. It is easily upgradable in the field to add QZSS and/or GLONASS and/or BeiDou and/or Galileo test capabilities to an existing GSS6300 unit. Typical configurations include:

- GPS only, GLONASS only, BeiDou only, Galileo only
- GPS and GLONASS
- GPS and BeiDou
- GPS and Galileo
- GPS and QZSS
- GPS, GLONASS and BeiDou
- GPS, GLONASS and Galileo
- GPS, QZSS, GLONASS, BeiDou and Galileo

To support varying test requirements, the GSS6300 can be controlled remotely via standard interfaces including IEEE-488, USB or RS-232. Alternatively, Spirent SimCHAN™ software is provided to enable real-time user control of the GSS6300 as precision laboratory GPS/SBAS/QZSS, GLONASS, BeiDou and/or Galileo test equipment.

The GSS6300 GPS/SBAS performance is equivalent to Spirent's proven GSS6100 Single Channel Production Test System. In addition, the GSS6300 offers QZSS, GLONASS, BeiDou and Galileo test capabilities to support your evolving GNSS testing needs



**GNSS Signal Generator:
Spirent GSS6300**

SPIRENT GSS6300

MULTI-GNSS SIGNAL GENERATOR

SPECIFICATION

Output Frequency

- GPS L1 1575.42MHz
- QZSS L1 1575.42MHz
- GLONASS L1 (Ch0) 1602MHz
- BeiDou-2 B1 1561.098MHz
- Galileo E1 1575.42MHz

Signal Codes

- GPS L1 C/A PRN 1 – 63
- SBAS L1 C/A PRN 120 – 138
- QZSS L1 C/A PRN 193 - 202
- GLONASS L1 C/A Channels -7 to +6
- BeiDou-2 B1 PRN 1 - 37
- Galileo E1 CBOC PRN 1 - 50

Signal Dynamics


- Relative Velocity (Max) ±15,000m/s
- Velocity Resolution 0.01m/s

Signal Level

- GPS/SBAS/QZSS L1 C/A - 130dBm nominal
- GLONASS L1 C/A -131dBm nominal
- BeiDou-2 B1 -133dBm
- Galileo E1 -127dBm nominal

Signal Level Control

- Range +15/-20dB
- Resolution 0.1dB
- Linearity ±0.5dB
- Accuracy ±1.0dB RSS

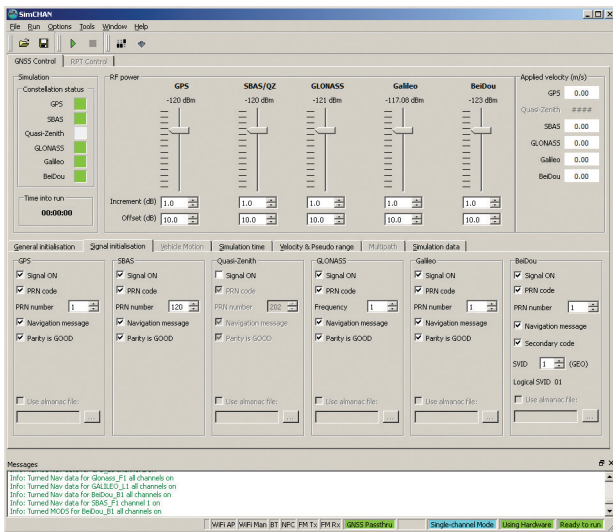

SimCHAN for Windows® User Interface

SALES AND INFORMATION

Spirent Communications plc, Aspen Way, Paignton, Devon TQ4 7QR, UK
 T: +44 1803 546325 globalsales@spirent.com | spirent.com/positioning

US Government & Defense: Spirent Federal Systems Inc. 1402 W. State Rd, Pleasant Grove, UT 84062

T: +1 801 785 1448 info@spirentfederal.com | spirentfederal.com

© 2015 Spirent Communications plc. All of the company names and/or brand names and/or product names referred to in this document, in particular the name "Spirent" and its logo device, are either registered trademarks or trademarks pending registration in accordance with relevant national laws. All rights reserved. Specifications subject to change without notice.


MCD00154 Issue 1-06 07/15

Signal Quality

- Spurious < -30dBc
- Harmonics < -40dBc
- Phase Noise < 0.1 Rad RMS
- Master Clock Stability < ±1 x 10⁻⁹ over one day

Signal Generator Unit

- Channel Type 1 GPS L1 C/A and SBAS or QZSS L1 C/A and/or 1 GLONASS L1 C/A and/or BeiDou-2 B1 and/or 1 Galileo E1
- Size (W x D x H) 449 x 386 x 89mm (17.75 x 15.25 x 3.5in)
- Weight 6.5kg (14.5 lbs)
- Power 100 – 240 V AC 50 – 60 Hz

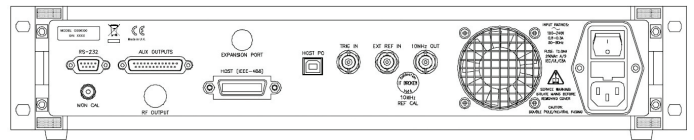

Typical Rear Panel Layout

