



# SBC-377

## 3.5" SBC Motherboard

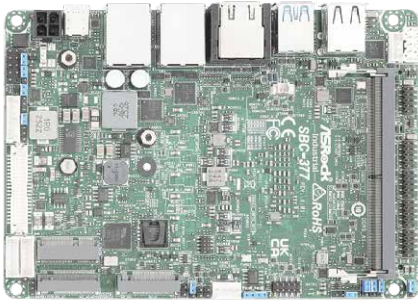

### KEY FEATURES

- Intel® Core™ Ultra Series 3 Processors (Panther Lake-H)
- 2 x 262-pin SO-DIMM DDR5 7200/6400 MHz, up to 128GB (64GB per DIMM)
- 1 x USB 3.2 Gen2x2, 2 x USB 3.2 Gen2, 6 x USB 2.0, 1 x M.2 Key E, 2 x M.2 Key M, 3 x COM
- 2 x Intel 2.5 Gigabit LAN
- Supports Quad display, 2 x HDMI 2.1, 1 x DP 1.4a (1 from Type-C), 1 x LVDS or eDP, 1 x eDP 1.4b
- Supports Intel® vPro Essentials, VMD RAID 0/1
- 12~36V DC-In PWR/ Supports Type-C PD 100W

### SPECIFICATIONS

#### Form Factor

Dimensions	3.5" SBC (5.8-in x 4-in x 0.94-in, 14.7 cm x 10.2 cm x 2.40 cm)
------------	---

#### Processor System

CPU	Intel® Core™ Ultra Series 3 Processors (Panther Lake-H) SBC-377P (Ultra X7 358H, 4P+8E+4LPE) SBC-377E (Ultra 5 325, 4P+4LPE)
BIOS	AMI SPI 256 Mbit

#### Memory

Technology	Dual Channel DDR5 7200 MHz (Ultra X7 358H) Dual Channel DDR5 6400 MHz (Ultra 5 325)
Capacity	128GB (64GB per DIMM)
Socket	2 x 262-pin SO-DIMM

#### Graphics

Controller	Intel® Graphics
HDMI	HDMI 2.1 Max resolution up to 4096 x 2160@60Hz
LVDS	Dual channel 24 bit up to 1920 x 1200@60Hz (Connector shared with eDP)*
eDP	eDP 1.4b Max resolution up to 4096x2160@60Hz Max resolution up to 1920 x 1080@60Hz (one eDP single connector shared with LVDS)
MultiDisplay	Quad display (Included 1 output from Type-C)

#### Expansion Slot

M.2	1 x M.2 (Key E, 2230) with PCIe Gen4 x1, USB 2.0 and CNVi for Wireless
-----	--

#### Audio

Interface	Realtek ALC256 HD, High Definition Audio.
-----------	---

#### Ethernet

Controller/ Speed	LAN1: Intel® I226LM with 10/100/1000/2500 Mbps, supports vPro LAN2: Intel® I226V with 10/100/1000/2500 Mbps
Connector	2 x RJ-45

#### Rear I/O

HDMI	2 x HDMI 2.1
Ethernet	2 x 2.5 Gigabit LAN
USB	2 x USB 2.0 2 x USB 3.2 Gen2 1 x USB 3.2 Gen2x2 (Type-C, 5V/3A, support DP 1.4a display output)

#### Internal Connector

USB	4 x USB 2.0 (2 x 2.00mm pitch header)
COM	COM3, COM4, COM5 (RS-232/422/485)
GPIO	4 x GPI, 4 x GPO
LVDS	1 (Connector with LVDS/eDP signal, switch by BIOS)
eDP	1
SATA PWR Output	1
Speaker Header	1

#### Storage

M.2	1 x M.2 (Key M, 2242/2280) with PCIe Gen5 x4 for SSD 1 x M.2 (Key M, 2242/3052) with PCIe Gen4 x4 for SSD
RAID	Intel® VMD RAID 0/1 **supported by PCIe interface PCIe interface: 2* M.2 Key M

#### Security

TPM	TPM 2.0 onboard IC (Optional) Intel® PTT
-----	---

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ..., 255sec

#### Power Requirements

Input PWR	12~36V DC-In with 4-pin wafer PWR cable 12V DC-In only (BOM option) USB Type-C PD (Power Delivery) 100W
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

#### Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40°C ~ 85°C
Operating Humidity	5% ~ 90% (non-condensing)
Storage Humidity	5% ~ 90% (non-condensing)