


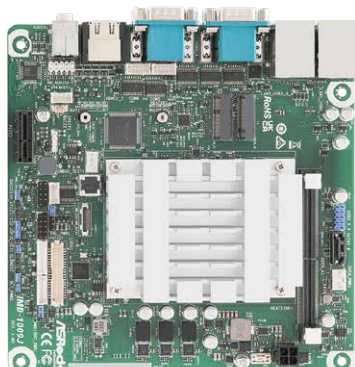

KEY FEATURES

- Intel® Twin Lake N150 Processors
- 1 x 262-pin SO-DIMM DDR5 4800 MHz, up to 16GB
- 1 x PCIe x1 (Gen3), 3 x USB 3.2 Gen2, 4 x USB 2.0, 1 x M.2 Key E,
- 1 x M.2 Key M, 6 x COM, 1 x SATA3
- 2 x Realtek Gigabit LAN
- Support Triple display, 2 x HDMI2.0b, 1 x LVDS or eDP
- 12V DC-In

SPECIFICATIONS

Form Factor

Dimensions	Mini-ITX (6.7-in x 6.7-in x 1.6-in, 17.0 cm x 17.0 cm x 4.0 cm)
------------	---

Processor System

CPU	Intel® Twin Lake Processors IMB-1009J (N150, QC, Max Speed Up to 3.6GHz, 6W)
BIOS	AMI SPI 256 Mbit

Memory

Technology	Single Channel DDR5 4800 MHz
Capacity	32GB
Socket	1 x 262-pin SO-DIMM

Graphics

Controller	Intel® UHD Graphics
HDMI	HDMI 2.0b Max resolution up to 4096 x 2160@60Hz
LVDS	Dual channel 24 bit up to 1920 x 1200@60Hz (Connector shared with eDP)
eDP	Max resolution up to 1920 x 1080@60Hz (Connector shared with LVDS)
MultiDisplay	Triple display

Expansion Slot

PCIe	1 x PCIe x1 (Gen3)
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless

Audio

Interface	Realtek ALC897 HD, High Definition Audio.Mic-in, Line-out
-----------	---

Ethernet

Controller/ Speed	LAN1: Realtek RTL8111H with 10/100/1000 Mbps LAN2: Realtek RTL8111H with 10/100/1000 Mbps
Connector	2 x RJ-45

Rear I/O

HDMI	2 x HDMI 2.0b
Ethernet	2 x 1 Gigabit LAN
USB	2 x USB 3.2 Gen2 2 x USB 2.0
Audio	2 (Mic-In, Line-Out)
COM	COM1 (RS-232/422/485) COM2, COM3, COM4 (RS-232)

Internal Connector

USB	2 x USB 2.0 (1 x 2.54 pitch header)
COM	COM5, COM6 (RS-232)
GPIO	4 x GPI, 4 x GPO
LVDS	1 (Connector with LVDS/eDP signal, switch by BIOS)
SATA PWR Output	1
Speaker Header	1

Storage

M.2	1 x M.2 (Key M, 2242/2280) with PCIe Gen3 x1 or SATA3 for SSD
SATA	1 x SATA3 (6Gb/s)

Security

TPM	Intel® PTT
-----	------------

Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec


Power Requirements

Input PWR	12V DC-In with 4-pin plug PWR cable
Power On	AT/ATX Supported
	- AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40°C ~ 85°C
Operating Humidity	5% ~ 90% (non-condensing)
Storage Humidity	5% ~ 90% (non-condensing)

BLOCK DIAGRAM

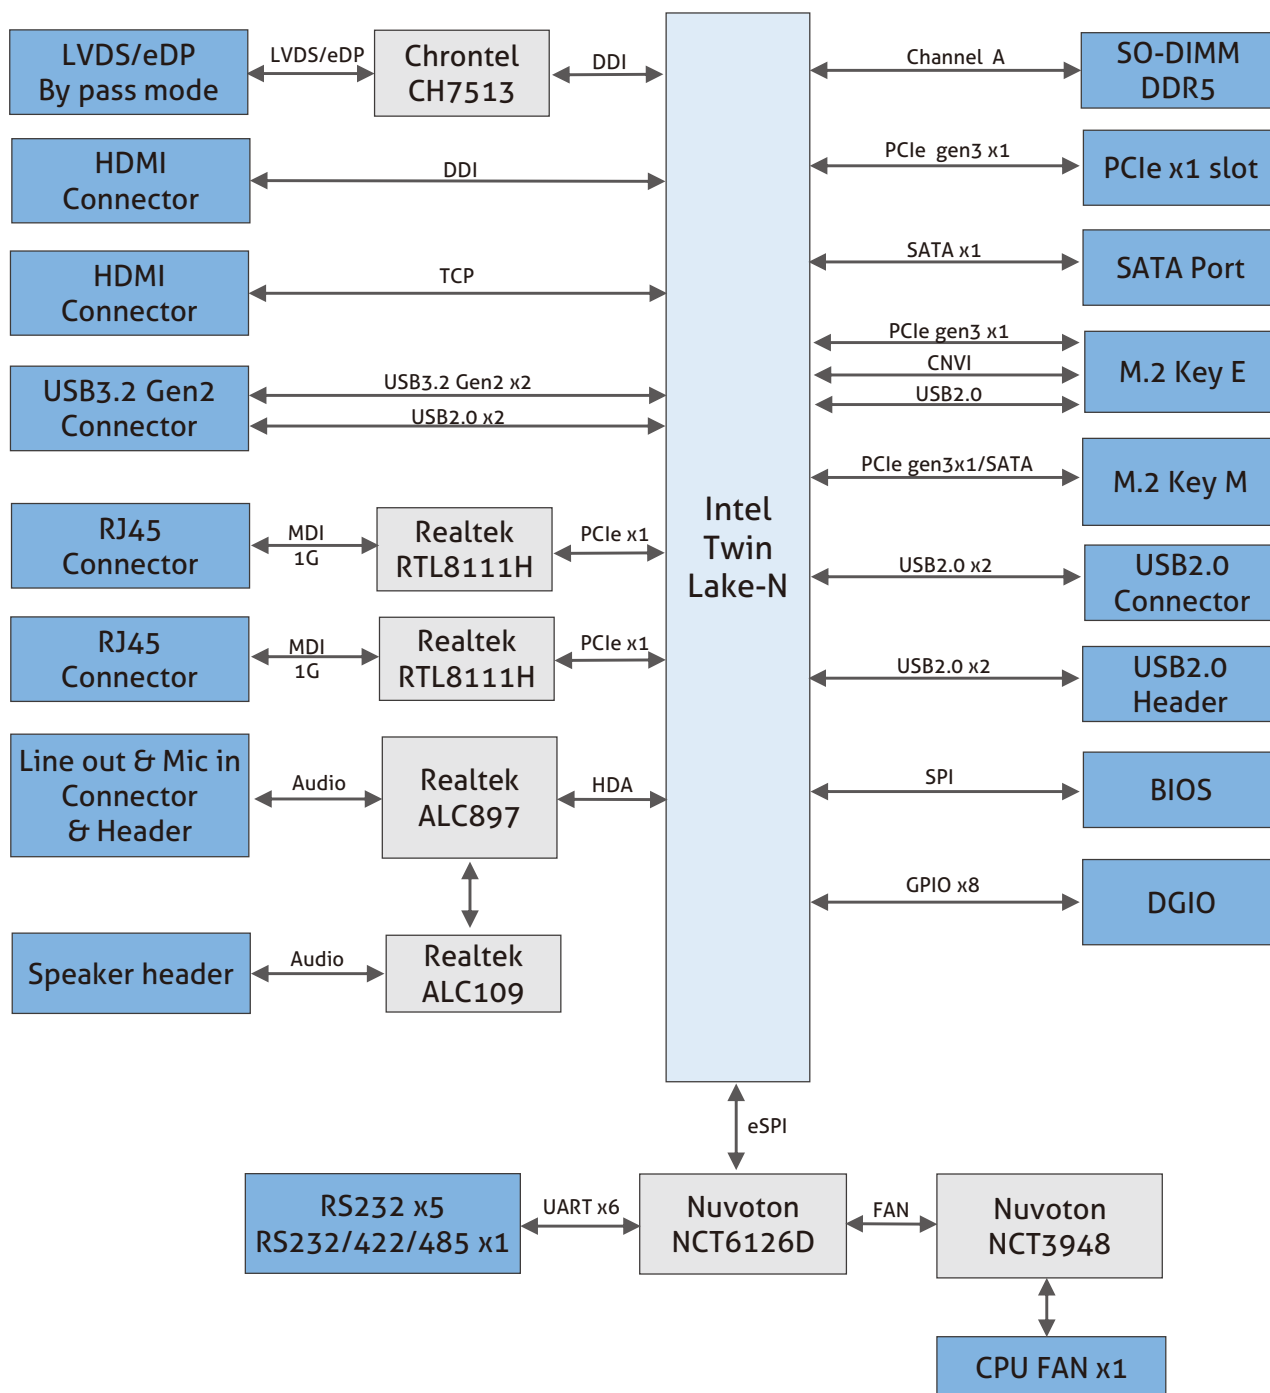

ORDERING INFORMATION

Ordering Information

Model	IMB-1009J
CPU/Chipset	N150
HDMI	2
LVDS/eDP	1/ (1)
1 Gbe LAN	2
COM	6
USB 3.2	2
USB 2.0	4
SATA III	1
M.2 E-Key	1
M.2 M-Key	1
TPM	FW TPM

Packing List (Bulk)

Description	Quantity
I/O Shield	1
SCREW M2*2	2
Mini Jumper 2.0mm	1

I/O View



Packing List (Gift)

Description	Quantity
SATA Data Cable	1
SATA Power Cable	1
I/O Shield	1
SCREW M2*2	2
Mini Jumper 2.0mm	1