

# Q370M-IM-A

Micro ATX , LGA1151 socket for 9th/8th Gen CPU, Q370 chipset, 4\*U-DIMM, 1\*PCIe x16,2\*DP, HDMI, D-SUB, Intel® vPro support



## Features

- Supports up to 3 display configuration by multiple interface:  
Dual DP/HDMI/D-SUB
- 7-year longevity supply
- Wide temperature range endurance: 0~60 °C

## Specifications




<b>PROCESSOR SYSTEM</b>	CPU	LGA1151 socket for 9 <sup>th</sup> /8 <sup>th</sup> Generation Intel® Core™ i9/ i7/ i5/ i3/Pentium®/Celeron® Processors
	CHIPSET	Intel® Q370 Chipset
<b>MEMORY</b>	Technology	DDR4 2666/2400/2133MHz
	Max.	64GB
	Socket	4 x U-DIMM
<b>Display</b>	Controller	Intel UHD Graphics 630/610
	HDMI	1, Supports HDMI 1.4 up to 4096 x 2160 @ 24Hz / 2560 x 1600 @ 60Hz
	Display Port	2, Supports DP 1.2a up to 4096 x 2304 @ 60 Hz
	D-Sub	1, Supports up to 1920 x 1200 @ 60Hz
<b>EXPANSION SLOT</b>	Multi Display	Dual DP +HDMI+D-SUB, DP+HDMI+D-SUB, Dual DP+HDMI, Dual DP+D-SUB,
	PCIe	1 x PCI Express 3.0/2.0 x16 2 x PCI Express 3.0/2.0 x1 1 x PCI
<b>ETHERNET</b>	M.2	2 x M.2 Socket with M Key, type 2242/2260/2280 storage devices with IRST support(1@ SATA* & PCIE mode), SATA mode share with SATA6G_2. Ready for Intel® Optane Memory 1 x M.2 Socket with E Key, type 2230 Wi-Fi devices support
	Speed	10/100/1000Mbps
<b>AUDIO</b>	Controller	1 x Intel® I219LM, supports WOL/PXE
	Connector	1 x RJ-45
<b>STORAGE</b>	Codec	Realtek® ALC887 8-channel High Definition Audio CODEC
	Connector	Line-in, Line-out, Mic-in
<b>Rear I/O</b>	SATA port	6 x SATA 6.0 Gb/s ports (gray), support Raid 0,1,5,10
	PS/2	1 x Keyboard (Purple), 1 x Mouse port (Green)
<b>Internal Connector</b>	DisplayPort	2
	HDMI	1
<b>Internal Connector</b>	D-SUB	1
	Ethernet	1
	USB	USB 3.2 Gen 2 (TypeA)x 1, USB 2.0 (TypeA) x 2
	Audio	3 Audio jacks support 8 channel
	Serial Port	2 (2 x RS 232)
	USB 3.2 Gen 1	2, support additional 4 x USB 3.2 Gen 1 connectors
	USB2.0	1, support additional 2 x USB2.0 connectors
	fan header	1CPU fan x 1, Chassis fan x 2
	Chassis intrusion header	1
	Front panel audio header (AAFP)	1
	System panel header	1
	Clear CMOS jumper	1
LPC Debug header	1	
LPT port header	1	
Power connector	1 x 24-pin ATX Power connector, 1 x 8-pin ATX 12V Power connector	

# Specifications

<b>Internal Connector</b>	Speaker connector	1
	MONO-out header	1 (with AMP IC)
	DIS ME jumper	1
<b>WATCHDOG TIMER</b>	H/W	No
<b>Security</b>	TPM	TPM 2.0 IC Onboard (NPCT750)
<b>POWER</b>	Power Type	ATX power
<b>Operating System</b>	Microsoft Windows	Windows® 10 (64bit ) / Win10 IoT Enterprise
	Linux	Ubuntu, RedHat Enterprise, Fedora Workstation
<b>ENVIRONMENT</b>	Operating Temperature	0~60° C
	(Non-Operating Temperature	:-40~85° C
<b>DIMENSION</b>	Form Factor	Micro ATX, 9.6 x 9.6 inches (24.4 x 24.4 cm)
<b>Certification</b>	EMI & Safety	CE, FCC

# Block Diagram

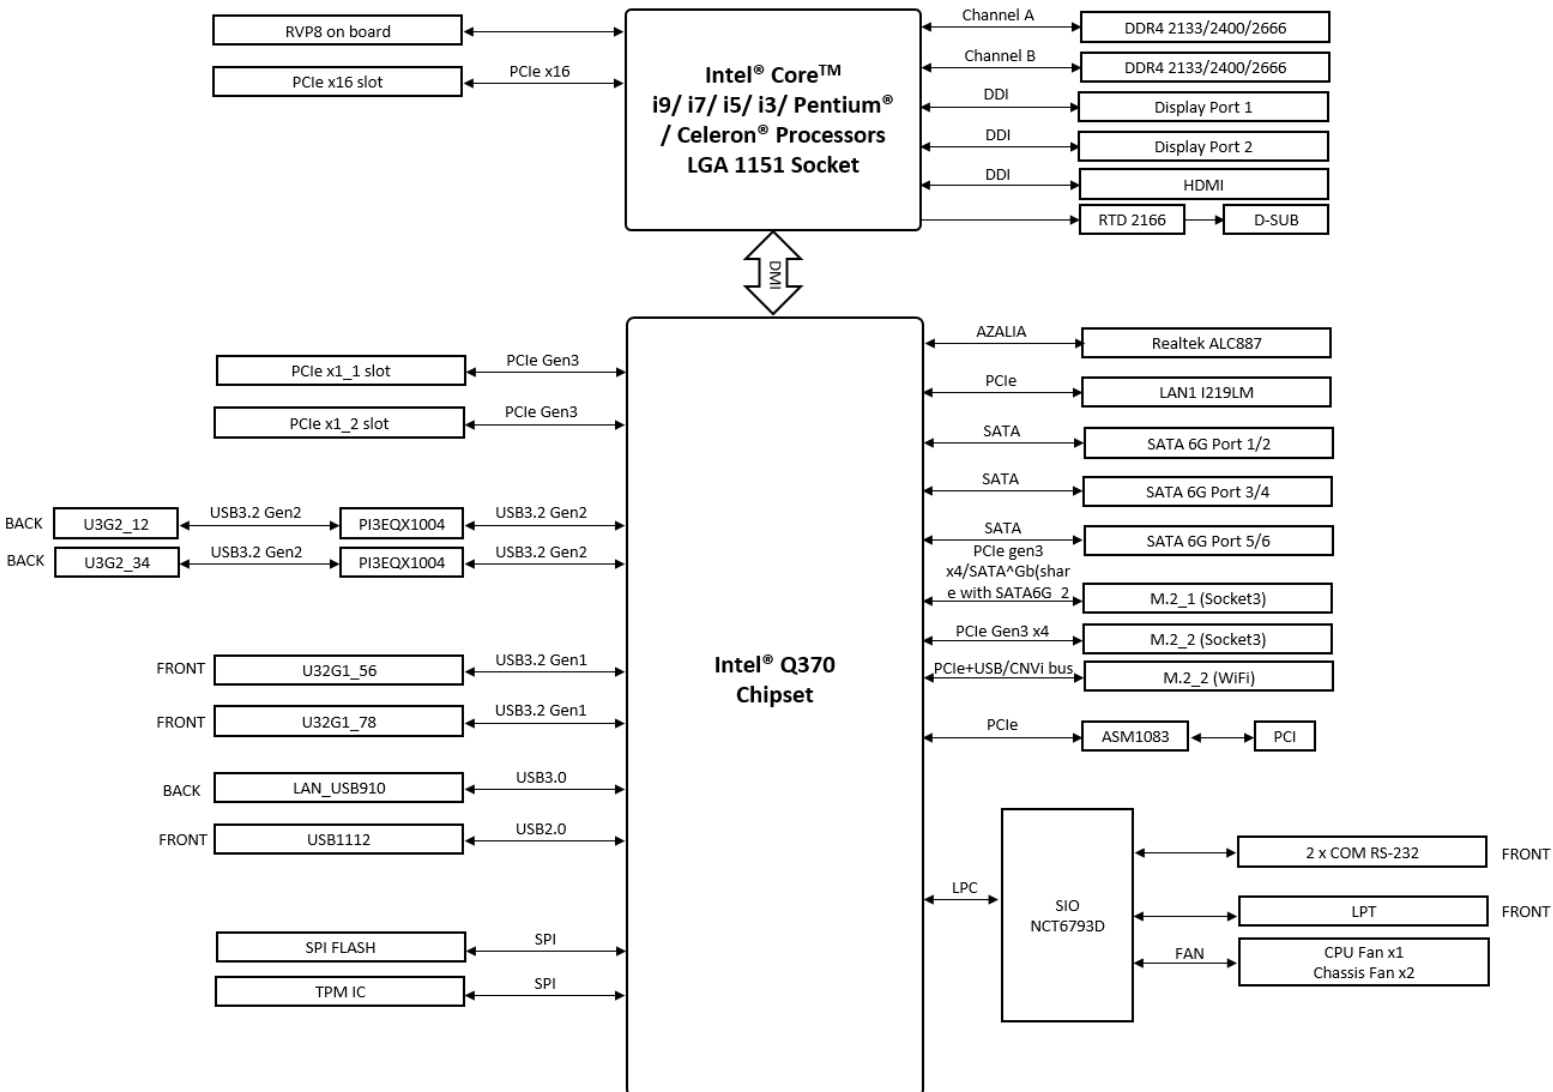

## Order Information

Model name	Part number	Description
Q370M-IM-A	90ME01K0*	LGA1151,Q370,USB3.1,2*DP,MB

\* The part number might vary for different regulations and package. Please consult the TPM in your region for exact 90PN.

## Packing List

Part number	Description	Quantity
13020*	IO shield	1
14013*	SATA 6G CABLE	1
13020*	M.2 screw pack 2IN1	1
13020*	M.2 screw pack	1

\* The part number might vary due to part number revision.