

# EBE-4UG

19" Rackmount 4U Barebone

## Features

- Standard 19" Rackmount 4U Chassis with 1.2mm durable SGCC sheet metal
- Compatible with ATX, Micro ATX, Mini ITX Form Factor MB
- Excellent expansibility with up to 7 Full Height PCI/PCIE Expansion Slots at rear I/O



## Specifications

<b>Drive Bay</b>	Storage	2*3.5" HDD + 1*3.5" Slim HDD (19mm)
<b>Front I/O</b>	USB2.0	2
<b>Switch</b>		1 x Power on/off, 1 x System Reset
<b>Rear I/O</b>	Standrad motherboard I/O shield	Depend on compatible motherboard design
<b>Expansion Slot</b>		7 slots, Full Height
<b>Indicators</b>	LED Indicators	Power LED, Reset LED
<b>Cooling</b>		1 x 12025 Fan
<b>Power Supply</b>	Wattage	300W Bronze or 500W GOLD ATX Power Supply
<b>Environment</b>	Operating Temperature	0~50°C
	Non-Operating Temperature	-15~60°C
	Relative Humidity	10~95%@40°C, non-condensing
<b>Physical Characteristics</b>	Steel plate thickness of chassis	1.2mm SGCC
	Dimension	430(W)x177(H)x450(H)mm
<b>Certification</b>	EMI & Safety	CE

## Front View




## Inside View



(The pictures are for reference only, actual product may vary)

## Dimension

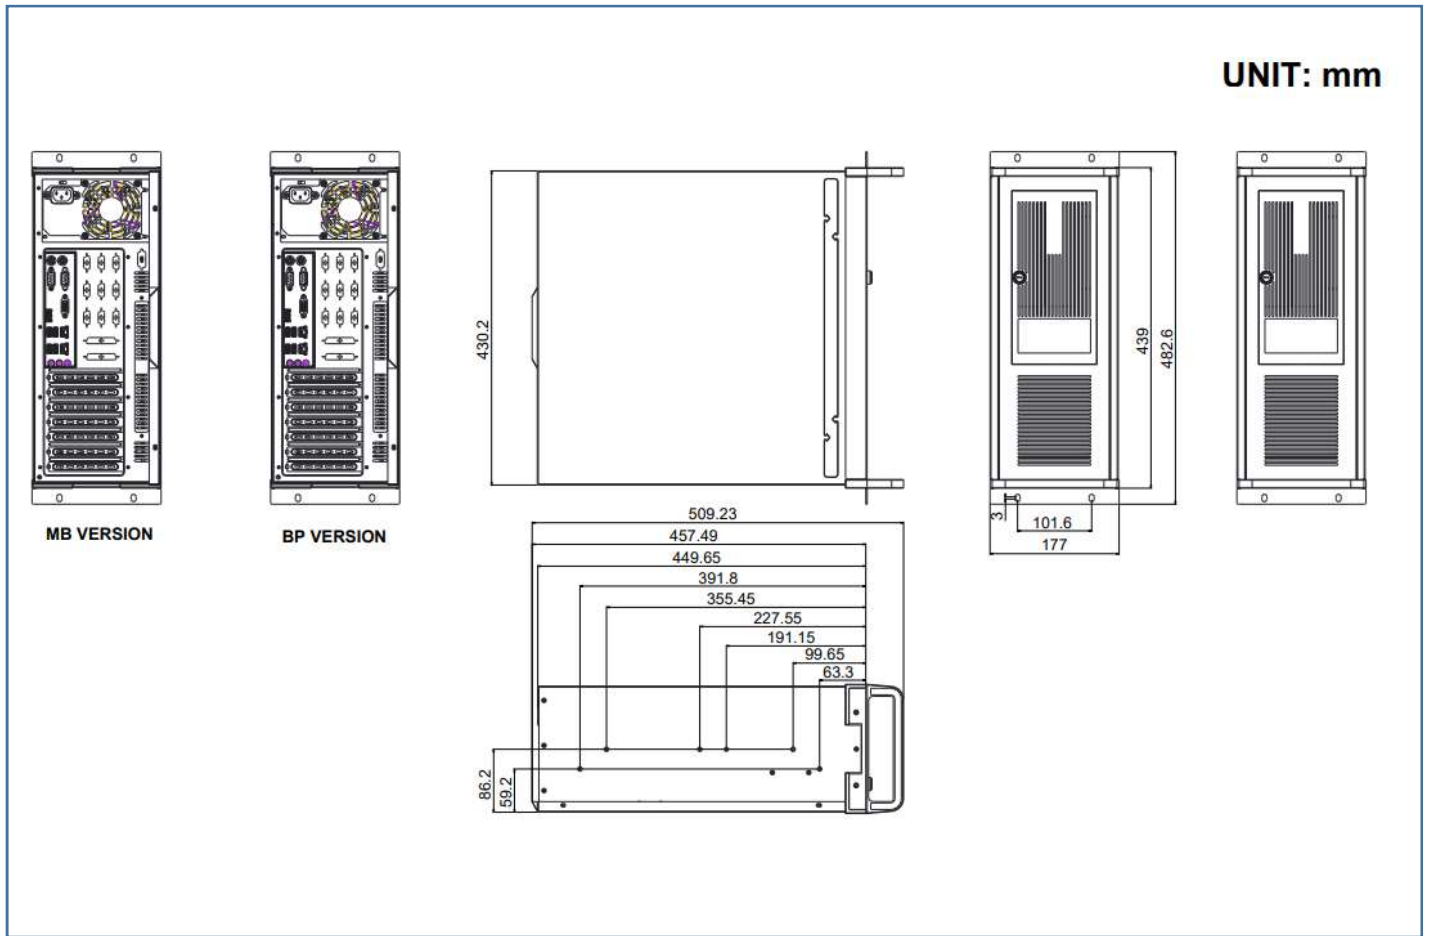

## Ordering Information

Model Name	Part number	Compatible ATX MB	Power Supply	NW
EBE-4U/H110A-IM-A	90AE0060*	H110A-IM-A ( CE ,FCC )	ATX 300W Bronze(CE,FCC,CCC)	13.36 KG
EBE-4UG/H110A-IM-A	90AE00H0*	H110A-IM-A ( CE ,FCC )	ATX 300W Bronze(CE,FCC,CCC)	13.36KG
EBE-4U/Q170A-IM-A 3B	90AE0061*	Q170A-IM-A ( CE ,FCC )	ATX 300W Bronze(CE,FCC,CCC)	13.36KG
EBE-4UG/Q170A-IM-A 3W	90AE00H1*	Q170A-IM-A ( CE ,FCC )	ATX 300W Bronze(CE,FCC,CCC)	13.36KG
EBE-4U/Q170A-IM-A 5B	90AE0062*	Q170A-IM-A ( CE ,FCC )	ATX 500W GOLD(CE, FCC,CCC)	13.64KG
EBE-4UG/Q170A-IM-A 5W	90AE00H2*	Q170A-IM-A ( CE ,FCC )	ATX 500W GOLD(CE, FCC,CCC)	13.64KG

## Packing List

Part Number	Description	Quantity
13050*	M.2 screw pack	1
14013*	SATA Cable	1
14G1100*	Power Cord	1
13AE0*	SYSTEM ACCESSORY	1