

Features

- 100 mm² PIN detector
- Light blocking encapsulant
- Low dark current
- High sensitivity

Description

Square active area PIN photodiode with 100 mm² active area. Ceramic carrier type 2-pin package with light blocking black epoxy encapsulant. Reflow solderable. Non-hermetic.

Application

- Ionizing radiation detector
- Medical equipment
- Personal dosimeter

RoHS


2002/95/EC




Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
T _{STG}	Storage temp	-40	100	°C
T _{OP}	Operating temp	-20	70	°C
V _{max}	Max reverse voltage		50	V
I _{PEAK}	Peak DC current		10	mA

Schematic

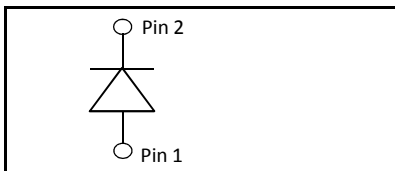

Absorption of gamma radiation (23 °C)

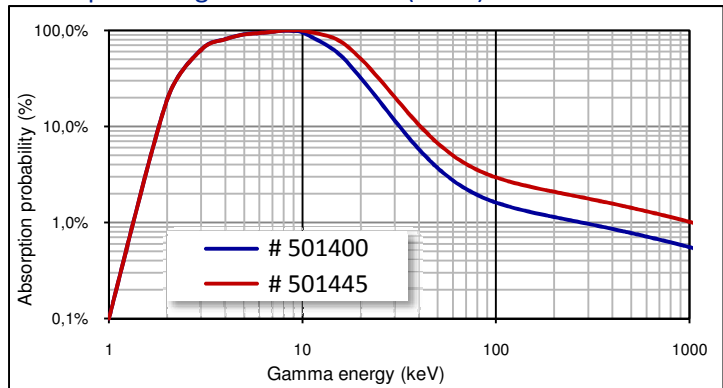

Electro-optical characteristics @ 23 °C

Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		10 x 10			mm
	Active area		100			mm ²
	Detectable radiation	Gamma radiation	5		1000	keV
	Count rate Cs-137	# 501400; V _R = 10 V		60		cpm /
		# 501445; V _R = 10 V		120		μSv/h
I _D	Dark current	# 501400; V _R = 10 V		3	10	nA
		# 501445; V _R = 10 V		5	10	nA
C	Capacitance	V _R = 0 V; f = 10 kHz		500		pF
		V _R = 10 V; f = 10 kHz	65	90	100	pF
t _R	Rise time	# 501400; V _R = 10 V; E = 10 keV; R _L = 50 Ω			500	ns
		# 501445; V _R = 10 V; E = 10 keV; R _L = 50 Ω			2000	ns
	Shunt Resistance	# 501400; V _R = 10 mV		40		MΩ
		# 501445; V _R = 10 mV			25	MΩ
V _{BR}	Breakdown voltage	I _R = 2 μA	50	80		V

European, International Sales:




First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:




First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Dark current (23 °C)

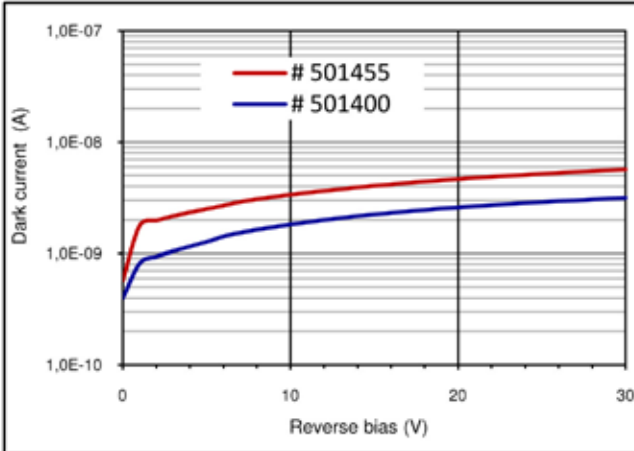

Capacitance as fct of reverse bias (23 °C)

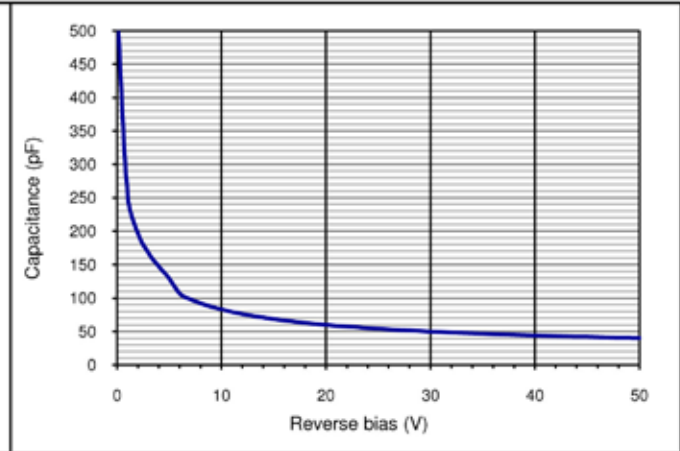

Package dimension:

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

Handling:

Please refer to document "Instructions for handling and processing"

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:



First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:



First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com